

### General Description

The LTA8261, LTA8262 and LTA8264 (LTA826x) are a family of micro-power, 48 V wide supply voltage, rail-to-rail output operational amplifiers capable of operating on supplies ranging from +4.5 V to +48 V. This new generation of high-voltage CMOS operational amplifiers, in conjunction with the LTA829x, LTA828x and LTA827x, provide a family of bandwidth, noise, and power options to meet the needs of a wide variety of applications. The LTA826x devices offer outstanding dc precision and ac performance, including low offset ( $\pm 2$  mV maximum), low offset drift ( $\pm 2$   $\mu\text{V}/^\circ\text{C}$  typically), 1.1 MHz bandwidth, and 22 nV/ $\sqrt{\text{Hz}}$  input voltage noise density at 1 kHz. Unique features such as differential input-voltage range to the negative supply rail, high output current ( $\pm 45$  mA), high capacitive load drive of up to 1 nF, and high slew rate (0.8 V/ $\mu\text{s}$ ) make the LTA826x high-performance operational amplifiers for high-voltage industrial applications.

The robust design of the LTA826x family provides ease-of-use to the circuit designer: integrated RF/EMI rejection filter, no phase reversal in overdrive conditions, and high electro-static discharge (ESD) protection. The LTA826x are optimized for operation at voltages from +4.5 V ( $\pm 2.25$  V) to +48 V ( $\pm 24$  V) over the extended temperature range of  $-40$   $^\circ\text{C}$  to  $+125$   $^\circ\text{C}$ .


### Features and Benefits

- Wide Supply:  $\pm 2.25$  V to  $\pm 24$  V, 4.5 V to 48 V
- Low Offset Voltage:  $\pm 2$  mV Maximum
- Low Offset Voltage Drift:  $\pm 2$   $\mu\text{V}/^\circ\text{C}$
- High Common-Mode Rejection: 112 dB
- Gain Bandwidth: 1.1 MHz
- Slew Rate: 0.8 V/ $\mu\text{s}$
- Low Noise: 22 nV/ $\sqrt{\text{Hz}}$  at 1 kHz
- Low Quiescent Current: 140  $\mu\text{A}$  per amplifier
- Low Bias Current:  $\pm 10$  pA
- Rail-to-Rail Output

### Applications

- Tracking Amplifier in Power Modules
- Power Delivery: UPS, Server, and Merchant Network Power
- High-Side and Low-Side Current Sensing
- Transducer Amplifiers
- Battery-Powered Instruments
- Test and Measurement Equipment
- Multiplexed Data-Acquisition Systems
- Programmable Logic Controllers

### Pin Configuration (Top View)

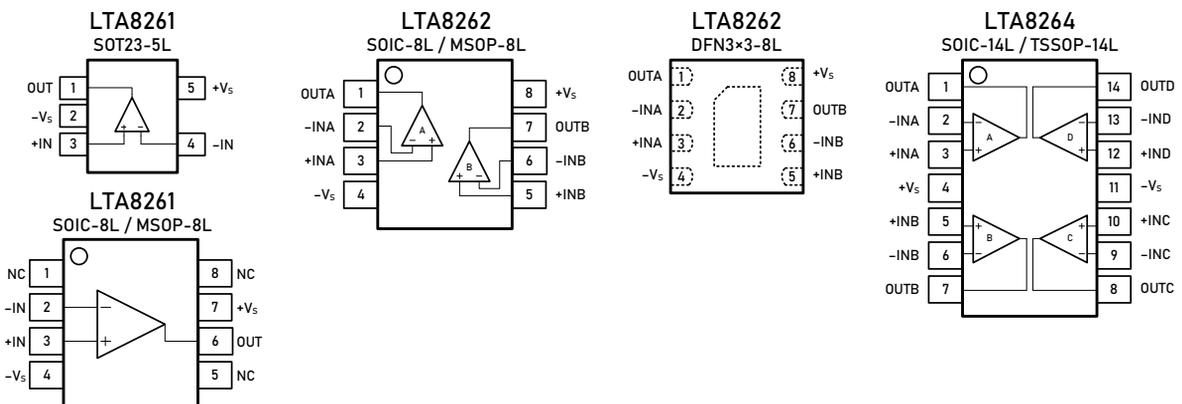

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

## Pin Description

Symbol	Description
-IN	Inverting input of the amplifier. The voltage range is from $V_{S-}$ to $V_{S+} - 1.5$ V.
+IN	Non-inverting input of the amplifier. This pin has the same voltage range as -IN.
+V <sub>S</sub>	Positive power supply. The voltage is from 4.5 V to 48 V. Split supplies are possible as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V.
-V <sub>S</sub>	Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V.
OUT	Amplifier output.
NC	No connection

## Ordering Information <sup>(1)</sup>

Type Number	Package Name	Package Quantity	Eco Class <sup>(2)</sup>	Marking Code <sup>(3)</sup>
LTA8261XT5/R6	SOT23-5L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	H61
LTA8261XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	HV-61
LTA8261XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV61
LTA8262XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	HV-62
LTA8262XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV62
LTA8262XF8/R10	DFN3x3-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV62
LTA8264XS14/R5	SOIC-14L	Tape and Reel, 2 500	Green (RoHS & no Sb/Br)	HV-64
LTA8264XT14/R6	TSSOP-14L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV-64

(1) Please contact to your Linearin representative for the latest availability information and product content details.

(2) Eco Class - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & Halogen Free).

(3) There may be multiple device markings, a varied marking character of "x", or additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

## Limiting Value - In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Absolute Maximum Rating
Supply Voltage, $V_{S+}$ to $V_{S-}$	60 V
Signal Input Terminals: Voltage, Current	$-V_S - 0.3$ V to $+V_S + 0.3$ V, $\pm 10$ mA
Output Short-Circuit	Continuous
Storage Temperature Range, $T_{stg}$	$-65$ to $+150$ °C
Junction Temperature, $T_J$	150 °C
Lead Temperature Range (Soldering 10 sec)	260 °C

## ESD Rating

Parameter	Item	Value	Unit
Electrostatic Discharge Voltage	Human body model (HBM), per MIL-STD-883J / Method 3015.9 <sup>(1)</sup>	2 000	V
	Charged device model (CDM), per ESDA/JEDEC JS-002-2014 <sup>(2)</sup>	2 000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible if necessary precautions are taken.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible if necessary precautions are taken.

## Electrical Characteristics

$V_S = 4.5 \text{ V to } 48 \text{ V}$ ,  $T_A = +25 \text{ }^\circ\text{C}$ ,  $V_{CM} = V_{OUT} = V_S/2$ , and  $R_L = 10 \text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted. Boldface limits apply over the specified temperature range,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ .

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<i>OFFSET VOLTAGE</i>						
Input offset voltage	$V_{OS}$			$\pm 0.6$	$\pm 2$	mV
Offset voltage drift	$V_{OS \text{ TC}}$	$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		$\pm 2$		$\mu\text{V}/^\circ\text{C}$
Power supply rejection ratio	PSRR	$V_S = 4.5 \text{ to } 48 \text{ V}$ , $V_{CM} = 0.1 \text{ V}$		5		$\mu\text{V}/\text{V}$
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		10		
<i>INPUT BIAS CURRENT</i>						
Input bias current	$I_B$			10		pA
		$T_A = -40 \text{ to } +85 \text{ }^\circ\text{C}$		150		
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		600		
Input offset current	$I_{OS}$			5		pA
<i>NOISE</i>						
Input voltage noise	$V_n$	$f = 0.1 \text{ to } 10 \text{ Hz}$		5		$\mu\text{V}_{P-P}$
Input voltage noise density	$e_n$	$f = 1 \text{ kHz}$		22		$\text{nV}/\sqrt{\text{Hz}}$
Input current noise density	$I_n$	$f = 1 \text{ kHz}$		5		$\text{fA}/\sqrt{\text{Hz}}$
<i>INPUT VOLTAGE</i>						
Common-mode voltage range	$V_{CM}$		$-V_S$		$+V_S - 1.5$	V
Common-mode rejection ratio	CMRR	$V_S = 40 \text{ V}$ , $V_{CM} = 0 \text{ to } 38.5 \text{ V}$		112		dB
		$V_{CM} = 0.1 \text{ to } 38 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		100		
		$V_S = 5 \text{ V}$ , $V_{CM} = 0 \text{ to } 3.5 \text{ V}$		93		
		$V_{CM} = 0.1 \text{ to } 3 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		82		
<i>INPUT IMPEDANCE</i>						
Input capacitance	$C_{IN}$	Differential		2		pF
		Common mode		3.5		
<i>OPEN-LOOP GAIN</i>						
Open-loop voltage gain	$A_{VOL}$	$V_S = 40 \text{ V}$ , $V_O = 0.1 \text{ to } 39.9 \text{ V}$		126		dB
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		118		
		$V_S = 5 \text{ V}$ , $V_O = 0.1 \text{ to } 4.9 \text{ V}$		116		
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		108		
<i>FREQUENCY RESPONSE</i>						
Gain bandwidth product	GBW			1.1		MHz
Slew rate	SR	$V_S = 40 \text{ V}$ , $G = +1$ , 10 V step		0.8		$\text{V}/\mu\text{s}$
Total harmonic distortion + noise	THD+N	$G = +1$ , $f = 1 \text{ kHz}$ , $V_O = 3 V_{RMS}$		0.0006		%
Settling time	$t_S$	To 0.1%, $V_S = 40 \text{ V}$ , $G = +1$ , 5 V step		16		$\mu\text{s}$
		To 0.01%, $V_S = 40 \text{ V}$ , $G = +1$ , 5 V step		22		
Overload recovery time	$t_{OR}$	$V_{IN} \times \text{Gain} > V_S$		2		$\mu\text{s}$


## Electrical Characteristics (continued)

$V_S = 4\text{ V to }48\text{ V}$ ,  $T_A = +25\text{ }^\circ\text{C}$ ,  $V_{CM} = V_{OUT} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted. Boldface limits apply over the specified temperature range,  $T_A = -40\text{ }^\circ\text{C to }+125\text{ }^\circ\text{C}$ .


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<i>OUTPUT</i>						
High output voltage swing	$V_{OH}$	$V_S = \pm 20\text{ V}$ , $R_L = 10\text{ k}\Omega$	$+V_S - 100$			mV
		$V_S = \pm 20\text{ V}$ , $R_L = 2\text{ k}\Omega$	$+V_S - 270$			
Low output voltage swing	$V_{OL}$	$V_S = \pm 20\text{ V}$ , $R_L = 10\text{ k}\Omega$	$-V_S + 60$			mV
		$V_S = \pm 20\text{ V}$ , $R_L = 2\text{ k}\Omega$	$-V_S + 250$			
Short-circuit current	$I_{SC}$		$\pm 45$			mA
<i>POWER SUPPLY</i>						
Operating supply voltage	$V_S$	$T_A = -40\text{ to }+125\text{ }^\circ\text{C}$	4.5		48	V
Quiescent current (per amplifier)	$I_Q$	$V_S = 5\text{ V}$	122			$\mu\text{A}$
		$V_S = 40\text{ V}$	140			
<i>THERMAL CHARACTERISTICS</i>						
Operating temperature range	$T_A$		-40		+125	$^\circ\text{C}$
Package Thermal Resistance	$\theta_{JA}$	SOT23-5L	190			$^\circ\text{C/W}$
		MSOP-8L	201			
		SOIC-8L	125			
		TSSOP-14L	112			
		SOIC-14L	115			

### Typical Performance Characteristics


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.

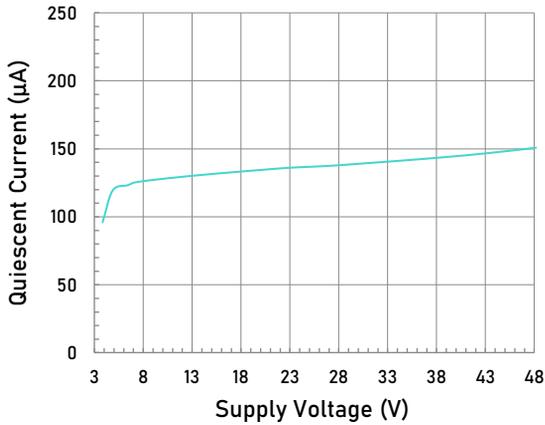


Quiescent Current as a function of Supply Voltage

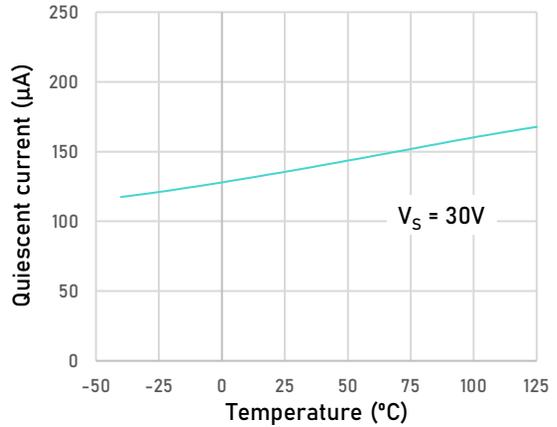


Quiescent Current as a function of Temperature

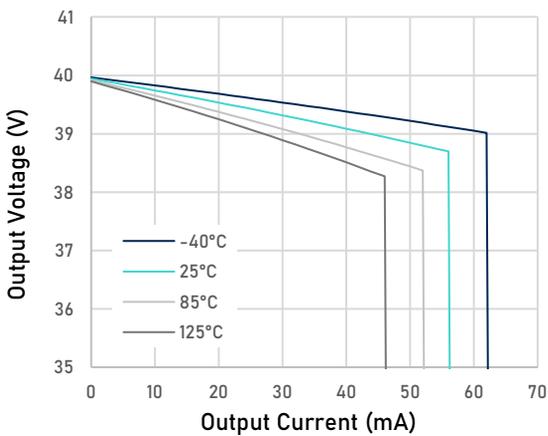


Output Voltage Swing as a function of Output Current (Sourcing,  $V_S = 40\text{V}$ )

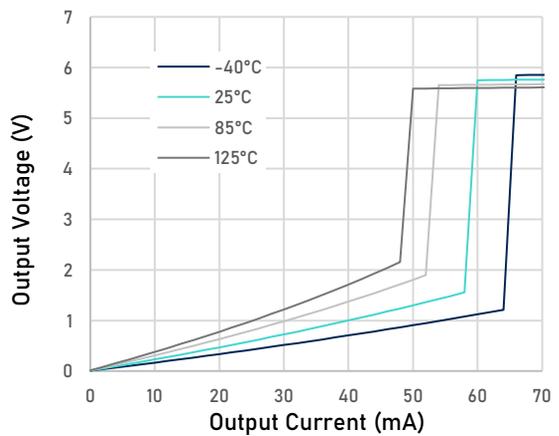

Output Voltage Swing as a function of Output Current (Sinking,  $V_S = 40\text{V}$ )

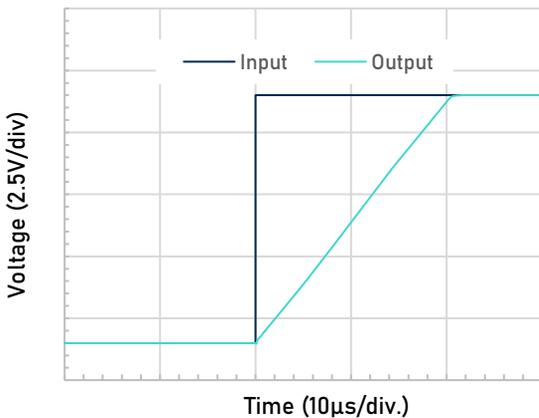

Large-Signal Step Response(Failing)

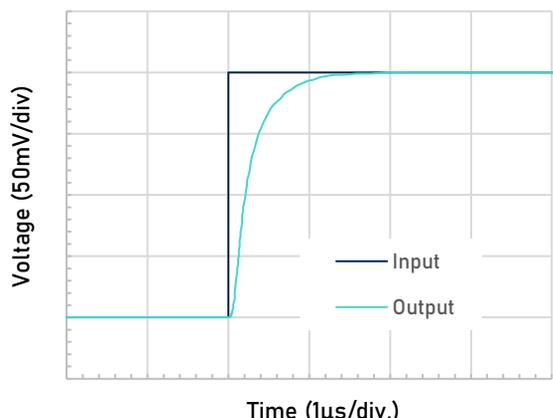


Small-Signal Step Response


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Tape and Reel Information

REEL DIMENSIONS

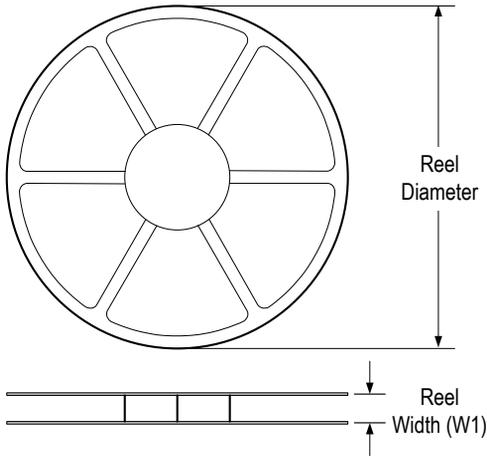


TAPE DIMENSIONS

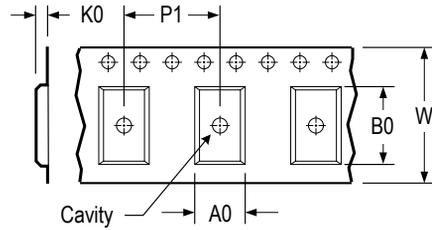

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

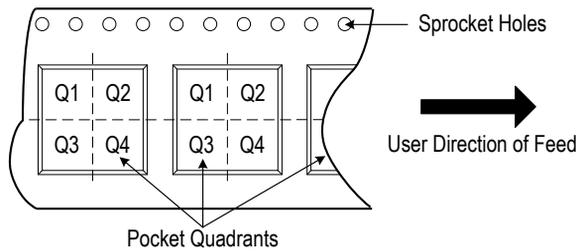


\* All dimensions are nominal


Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
LTA8261XT5/R6	SOT23	5	3 000	178	9.0	3.3	3.2	1.5	4.0	8.0	Q3

Package Outlines

DIMENSIONS, SOT23-5L

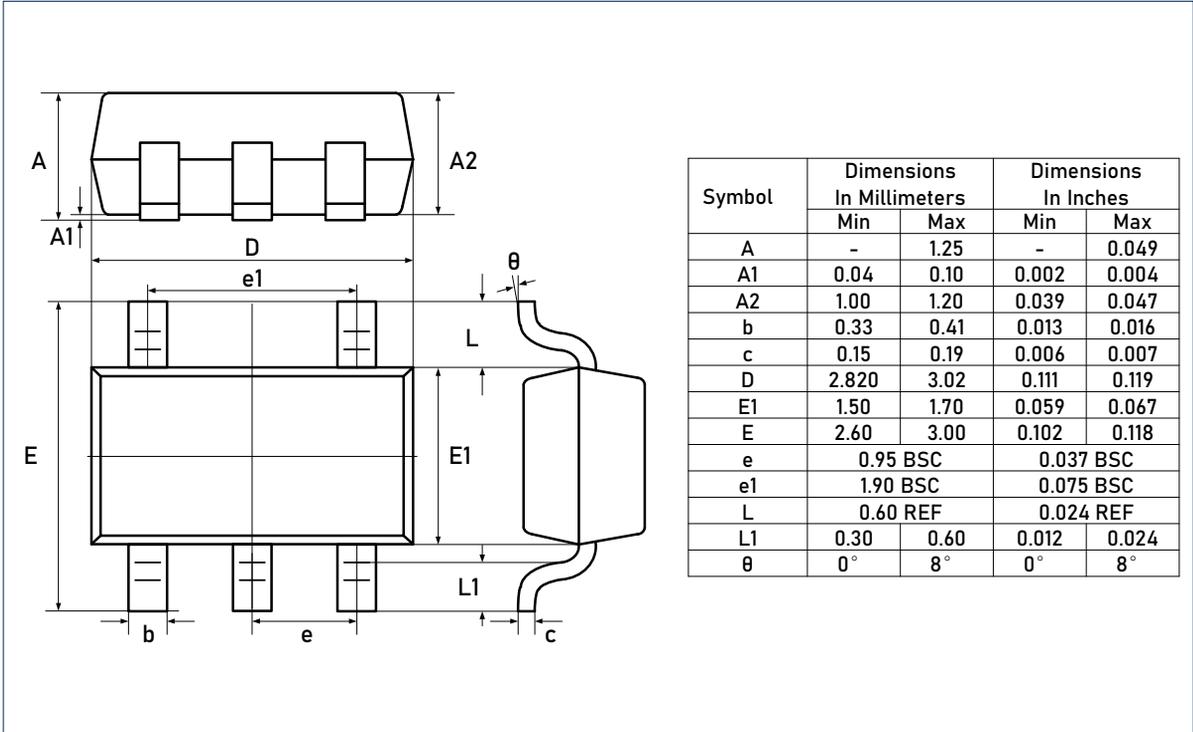


RECOMMENDED SOLDERING FOOTPRINT, SOT23-5L

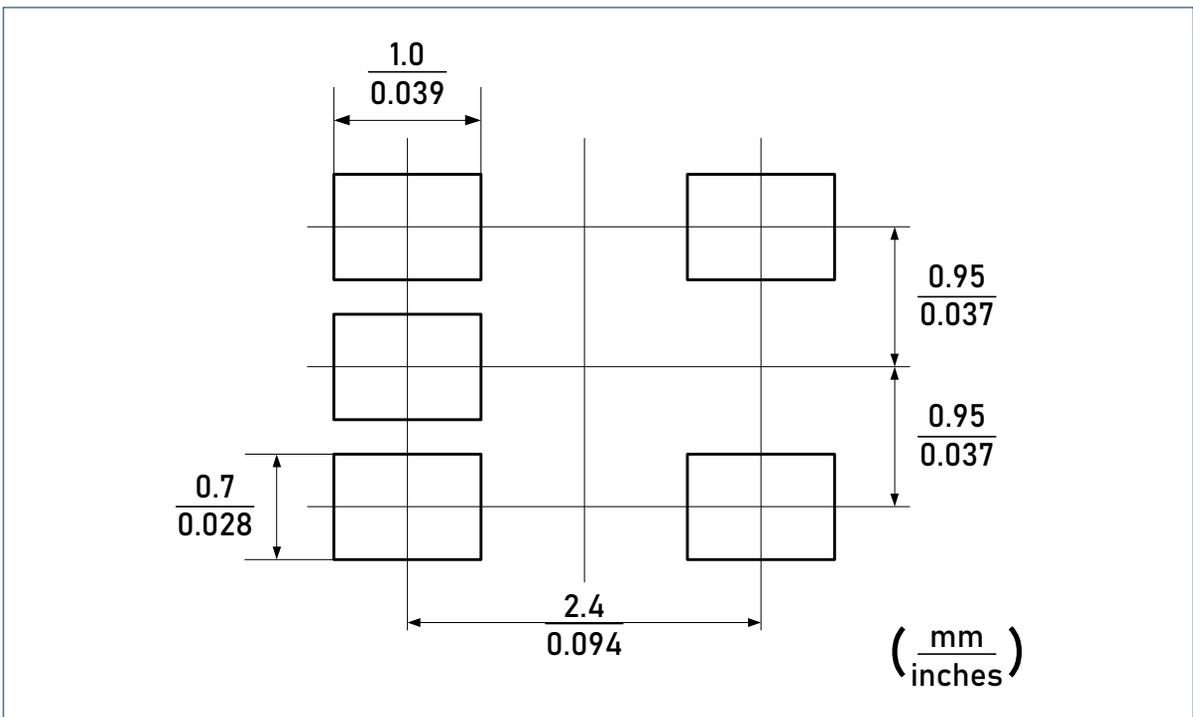


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, SOIC-8L

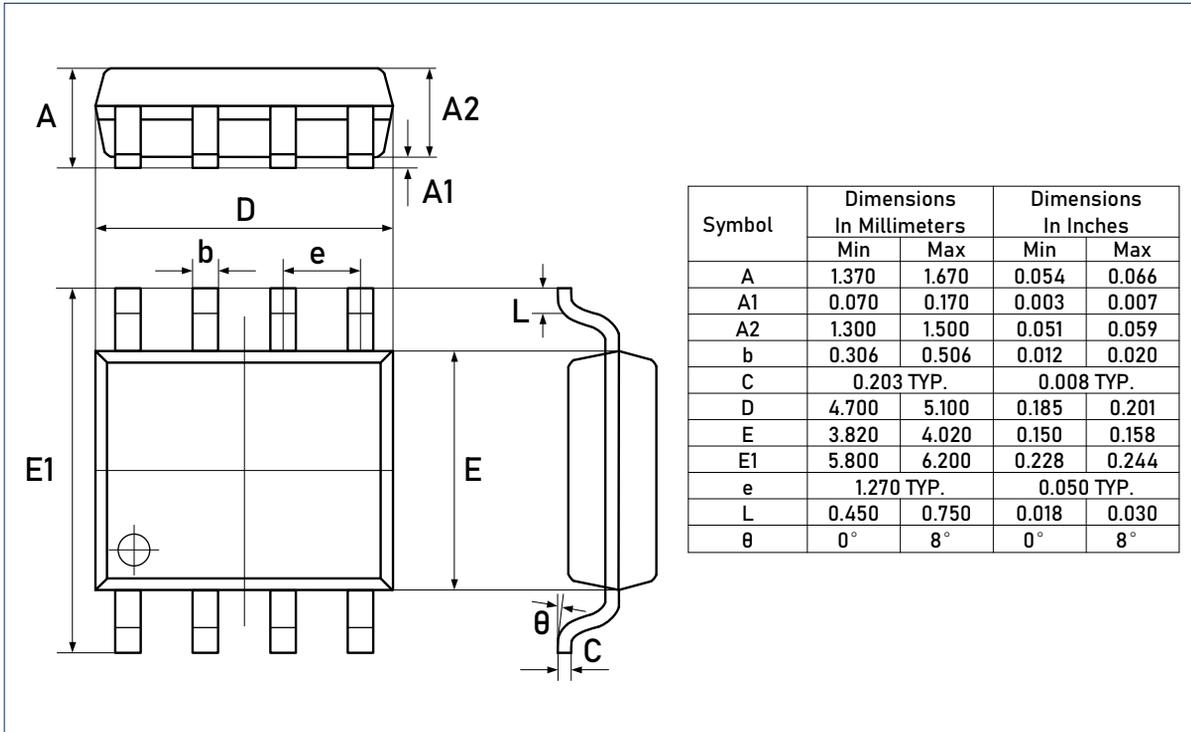


RECOMMENDED SOLDERING FOOTPRINT, SOIC-8L

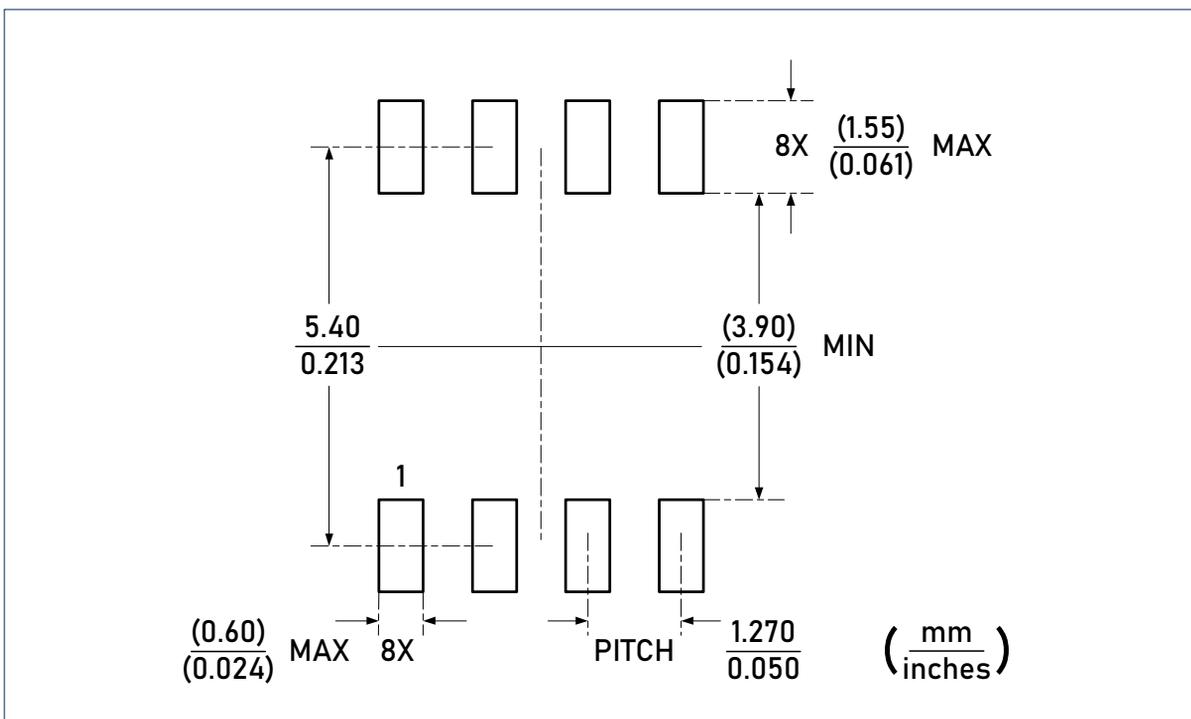


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, MSOP-8L

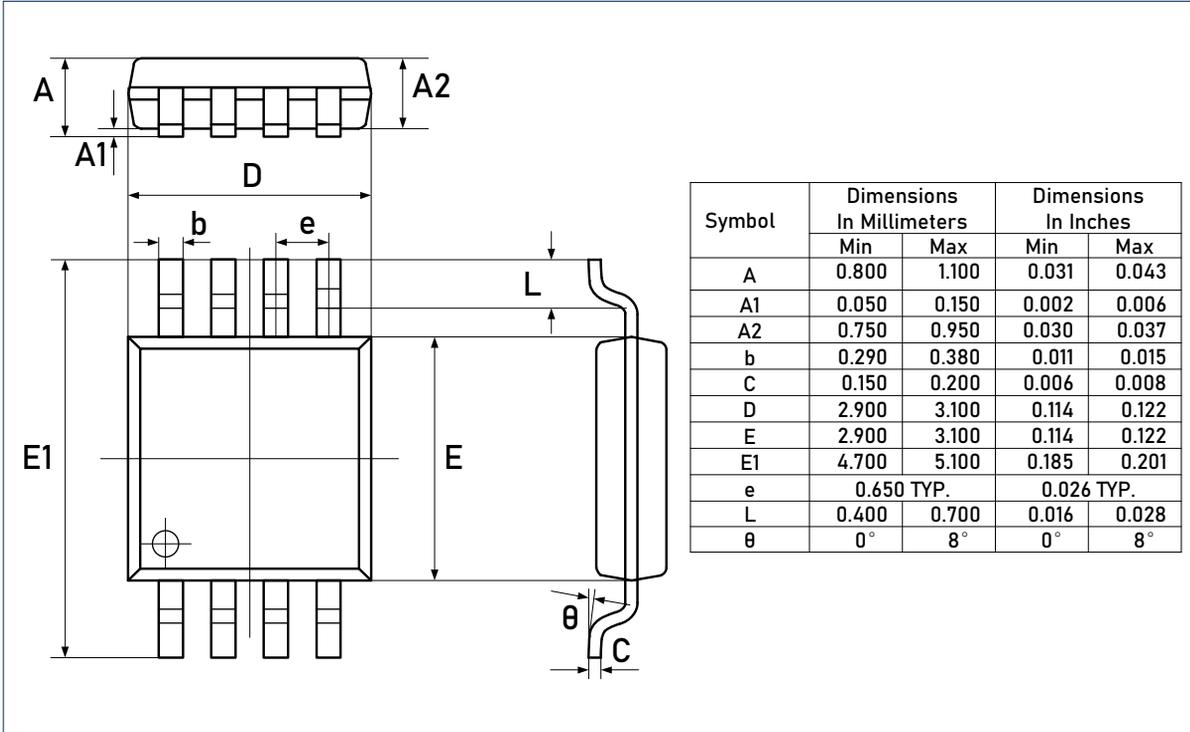


RECOMMENDED SOLDERING FOOTPRINT, MSOP-8L

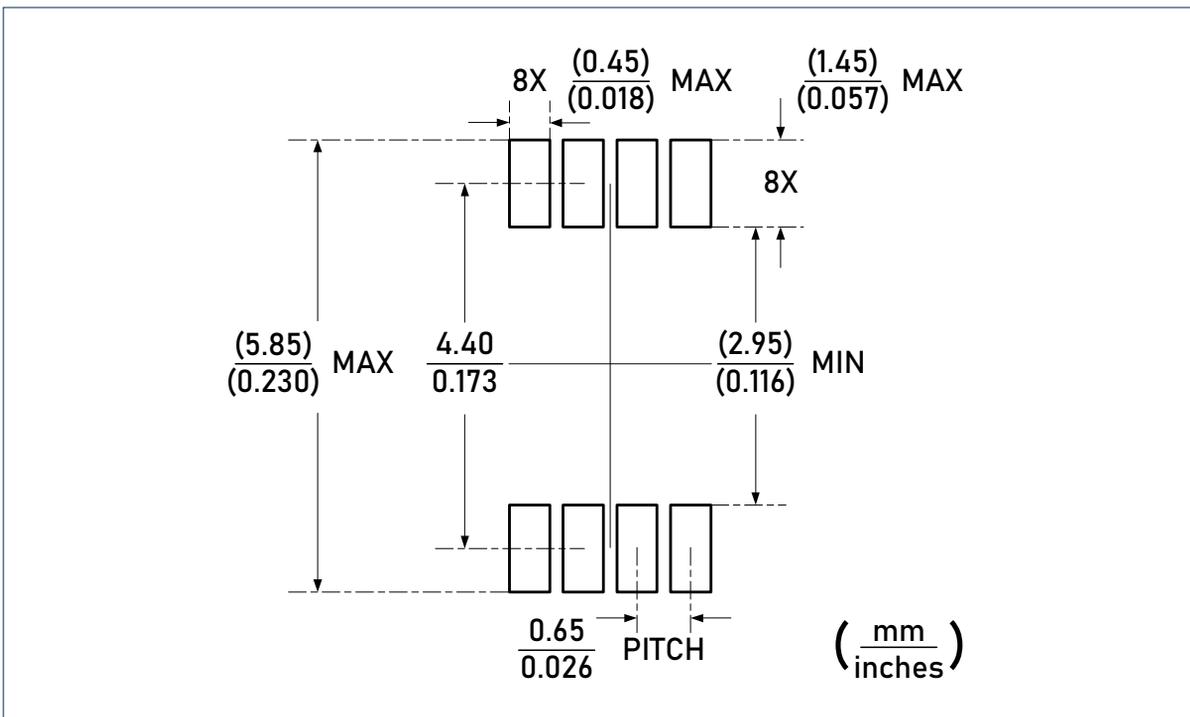

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.


Package Outlines (continued)

DIMENSIONS, DFN3x3-8L

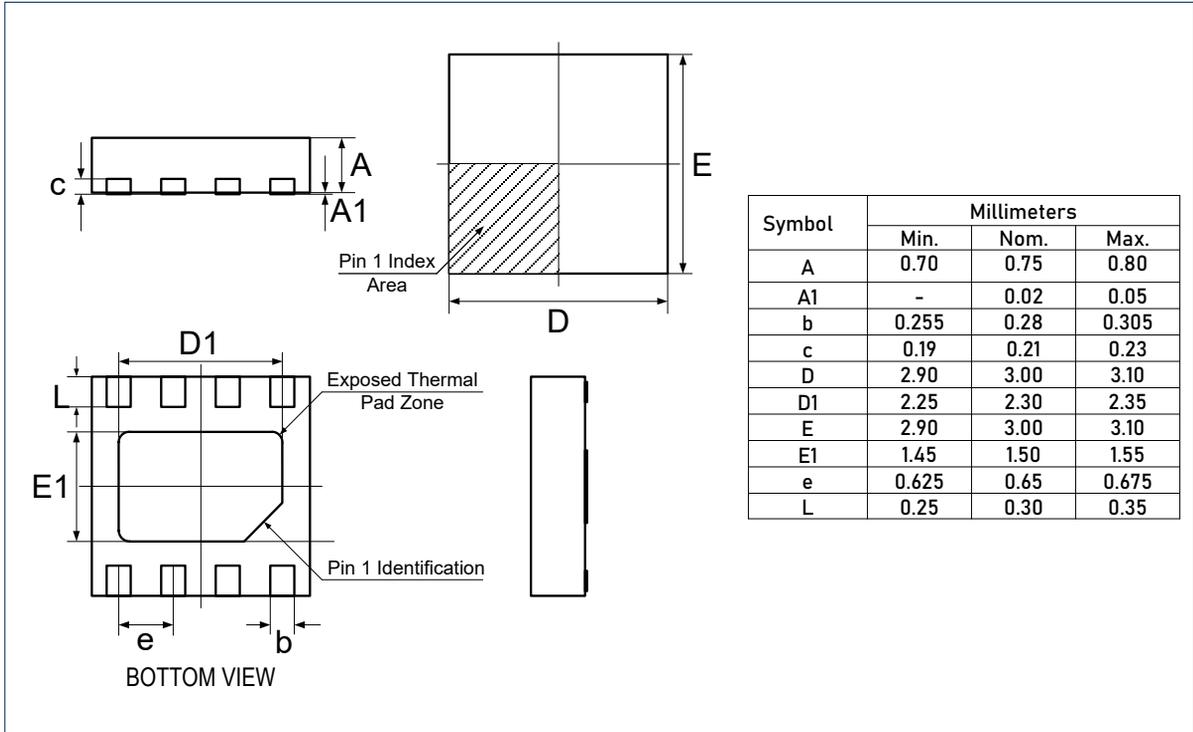


Package Outlines (continued)

DIMENSIONS, SOIC-14L

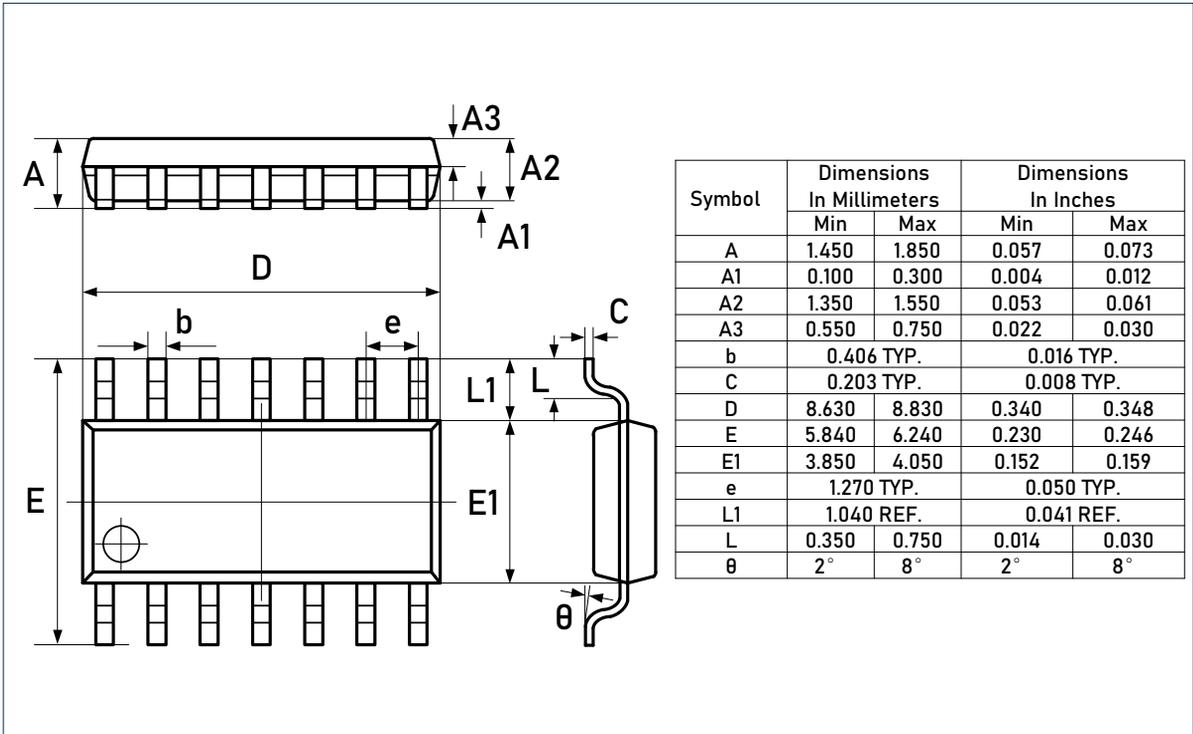


RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

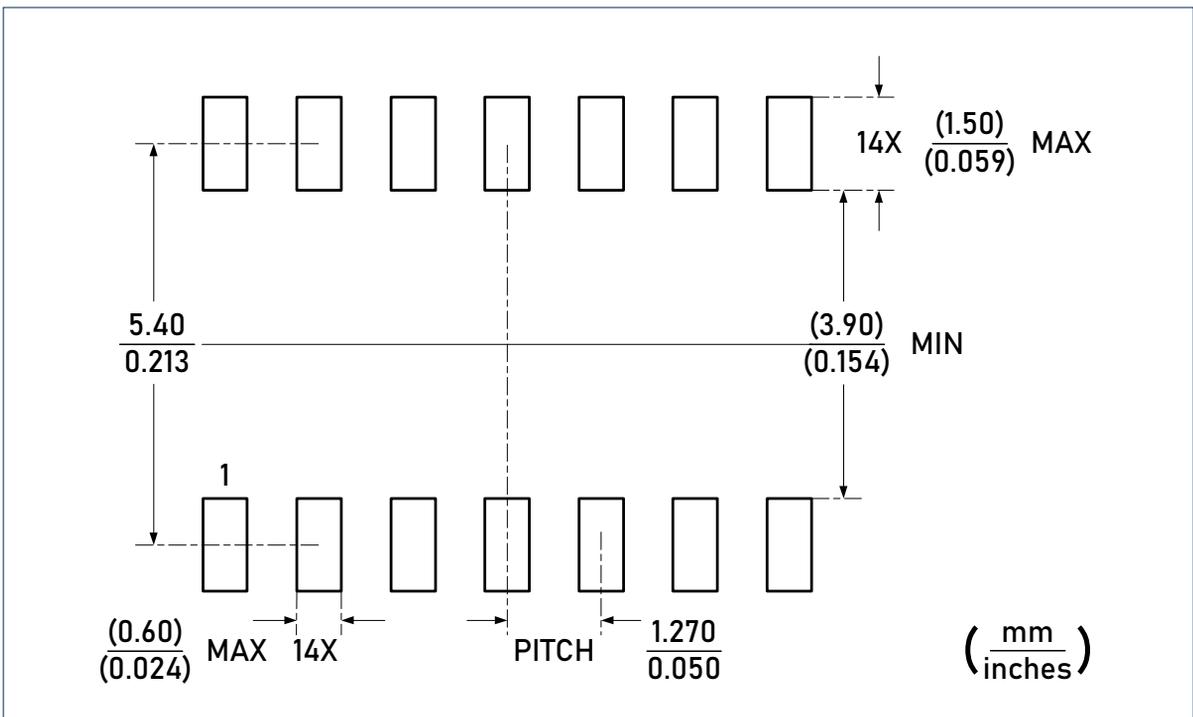


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, TSSOP-14L

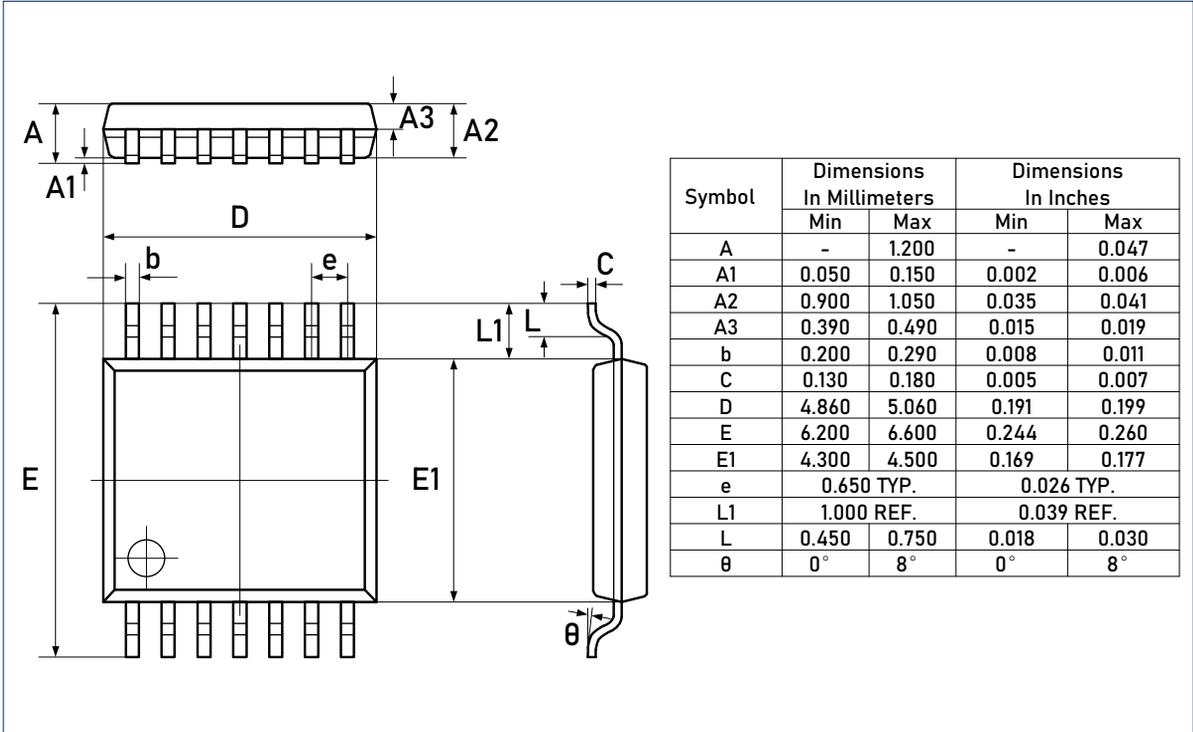

RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

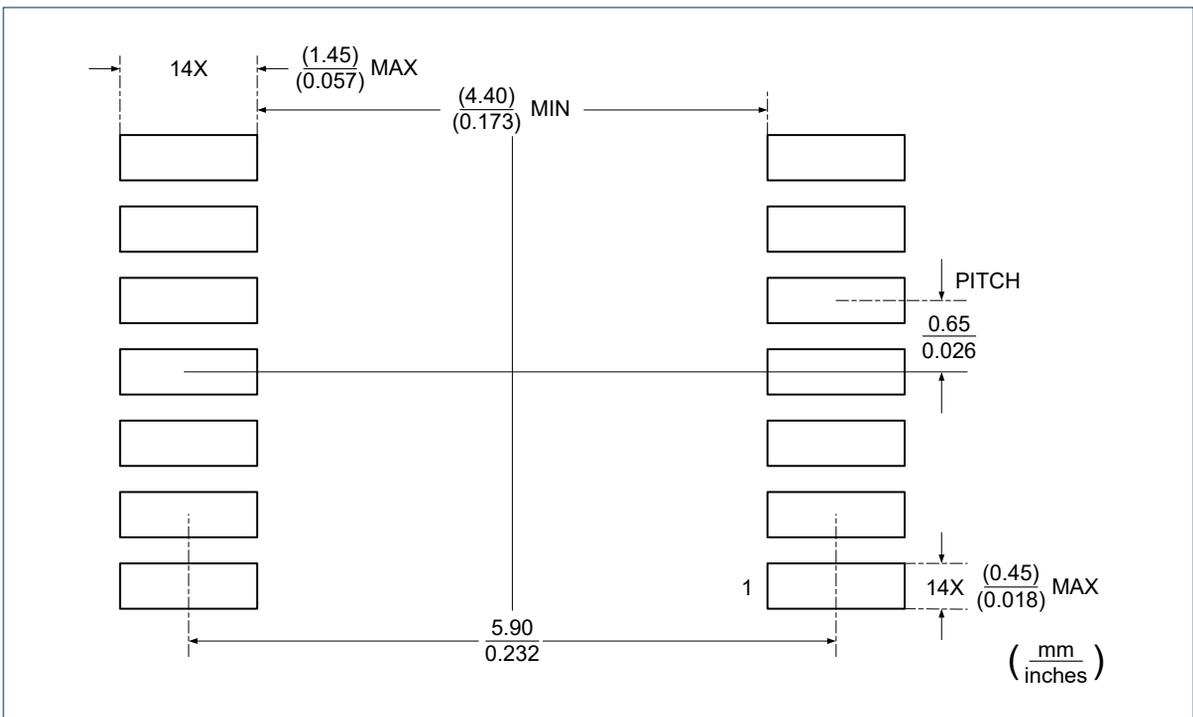

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

## Important Notice

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industrie 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.